

FLOATLESS SWITCH OGPN

\$38.00 EA

FEATURES

- Automatic control of water level
- 2nd Voltage between electrodes 8V AC
- LED are provided to indicate operating condition
- Suitable for water supply and drainage
- Plug in assembly, compact volume, easy mounting and replacement




OGPN

SPECIFICATIONS

Model Number	OGPN
Rated Voltage	200 ~ 220 V AC (50/60 Hz)
Power Consumption	Approx. 3.2VA
Operating Voltage	Less than $\pm 10\%$ of Rated Voltage
2nd Voltage between Electrodes	8V AC (2nd Voltage)
Operate Resistance	Below Approx. $4K\Omega$
Release Resistance	Above Approx. $15K\Omega$
Resetting Time	Operate: Below 80ms Release: Below 16ms
Contact Rating	220V AC, 2.5A (Resistive Load)
Life	Mechanically: 5,000,000 Operations Electrically: 2,000,000 Operations
Insulation Resistance	100m Ω min. at 500 V DC
Dielectric Strength	2000V AC (50/60 Hz) for 1 min
Protection	IP50 (Indoor use only)
Material	ABS Resin
Weight	Approx. 230g

Dimension

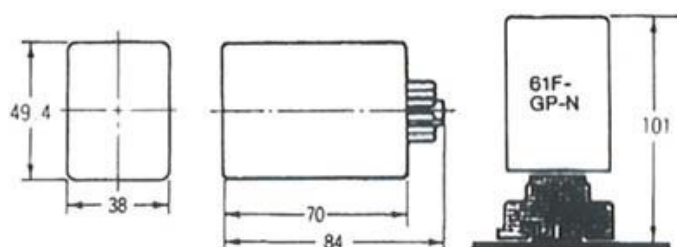

Connection

